



AKZ 960



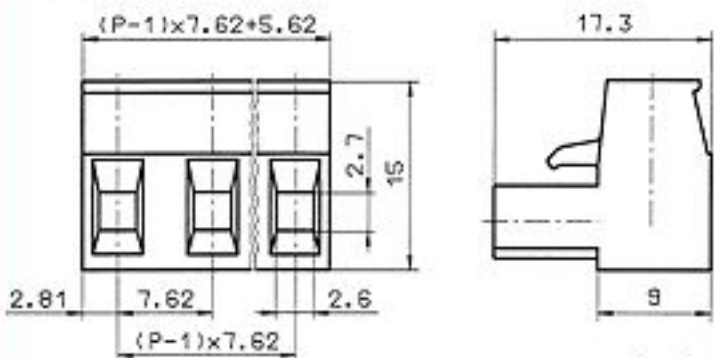

P = No. of poles

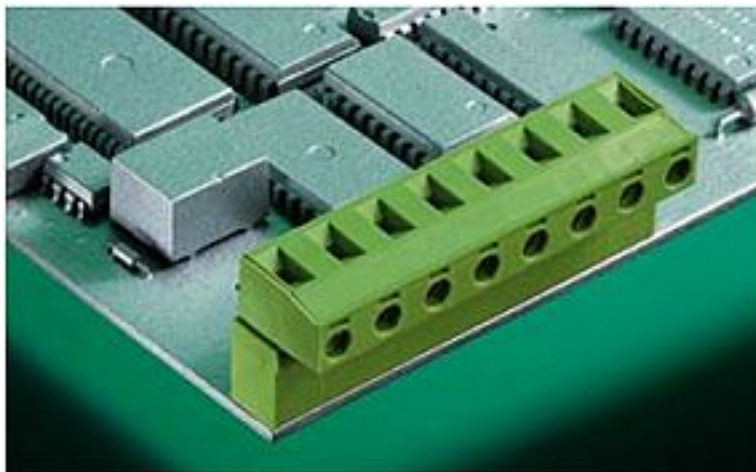

AKZ 960/.. - 7,62 - green

2-16 poles, Spacing 7,62 mm
insert required no. of poles ..

Ratings:

			
Rated Voltage	300 V	300 V	400 V
Rated Current	15 A	15 A	12 A (T60)
Wire Size	AWG 22-12	AWG 28-12	2,5 mm ²
Rating Impulse Voltage/Dirt Level			6 kV/3
Rated Torque / Screw Size			0,5 Nm/M3
Max. Rated Cross Section			
Single Wire (solid)			2,5 mm ²
Stranded Wire (flexible)			2,5 mm ²
Stranded wire with Ferrules			2,5 mm ²

Dimensions

Spacing	7,62 mm
Stripped Length	6,0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Contact	CuSn
Colour	green
	RAL 6018