
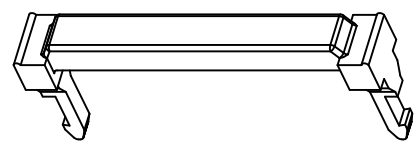



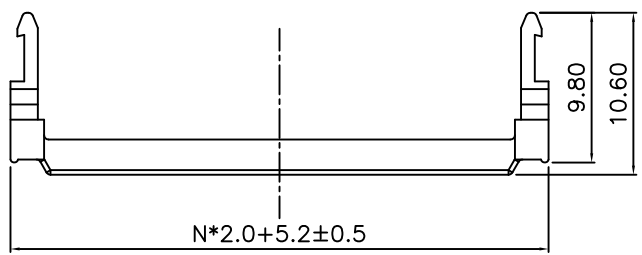
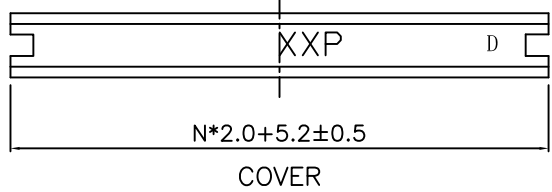
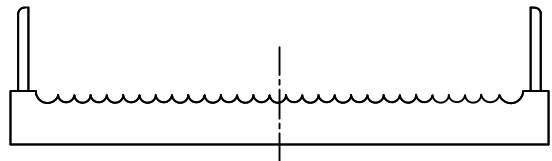
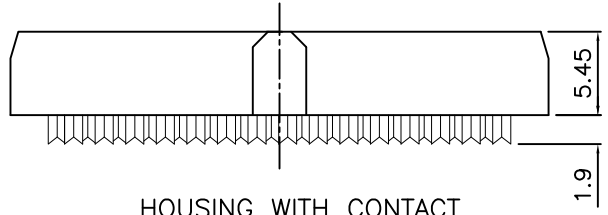


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'	~	LJC 12/08/06'
B	整理图纸	YCH 07/27/11'	~	

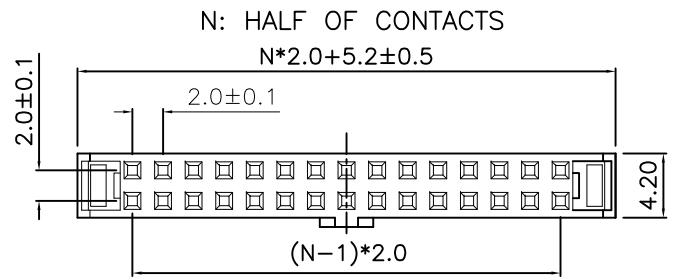

NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT: COPPER ALLOY.
- SPECIFICATION
 - TEMPERATURE RANGE:-40~+105°C.
 - CONTACT RESISTANCE:20mΩ max.
 - INSULATION RESISTANCE:1000MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
- PART NUMBER: DS1017
 DS1017- X X X X X
 HOUSING COLOR
 G: GRAY
 B: BLACK
 L: BLUE
 CONTACT PLATING
 8: FULL GOLD FLASH
 6: FULL TIN
 2: NICKEL+GOLD FLASH
 POLARIZATION
 A: W/
 B: W/O
 STRAIN RELIEF
 M: W/
 N: W/O
 No. OF CONTACTS
 10 12 16 20 22 24 26 30
 34 36 40 44 50 56 68

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	IDC SOCKET PITCH 2.0mm
X.	±0.60	X.	±5°	UNITS	mm		WITH 1.0mm FLAT CABLE
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1017 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO., LTD			
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1017-XXXXX						