


## AK 3950



**P = No. of poles**

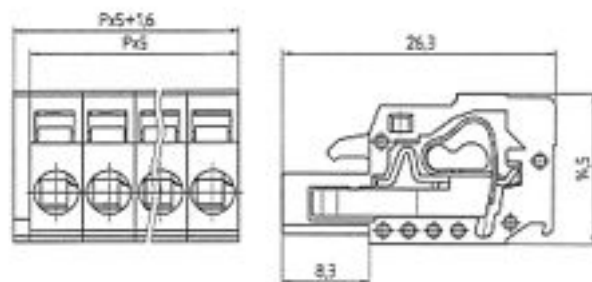

### AK 3950/.. - 5,0 - green

**1-24 poles, Spacing 5,0 mm  
insert required no. of poles ..**

#### Ratings:

			
	UL 1059	CSA 22.2 No. 158	VDE 0627
Rated Voltage	300 V	300 V	250 V
Rated Current	15 A	15 A	12 A (T60)
Wire Size	AWG 28-12	AWG 28-12	2,5 mm <sup>2</sup>
Test Voltage			2,21 kV

#### Max. Rated Cross Section

Single Wire (solid)	2,5 mm <sup>2</sup>
Stranded Wire (flexible)	2,5 mm <sup>2</sup>
Stranded wire with Ferrules	1,5 mm <sup>2</sup>

#### Dimensions

Spacing	5,0 mm
Stripped Length	8,5 mm

#### Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Cage clamp	stainless steel
Contact	Cu
Colour	
green	RAL 6018